

## *Black Opal Xtreme Land 15* Ground Mobile Special Flat Panel Display System

**X**TREME  
LAND 15



### TABLE OF CONTENTS

Chapter	Page
<b>1 DESCRIPTION</b>	<b>1-1</b>
<b>2 SPECIFICATIONS</b>	<b>2-1</b>
2.1 System Performance	2-1
2.2 Controls	2-4
2.3 Communications	2-4
2.4 Physical Characteristics	2-5
2.5 Electrical Requirements	2-5
2.6 Environmental	2-5
2.7 Connector/Pin Details	2-6
<b>3 SET-UP</b>	<b>3-1</b>
3.1 Mounts	3-1
3.2 Connections	3-1
3.3 Set-up Procedure	3-2
3.4 Heating and Cooling	3-3
<b>4 OUTLINE DRAWING</b>	<b>4-1</b>
<b>LIST OF FIGURES</b>	
Figure 3-1: Mounts	3-1
Figure 3-2: Connections	3-2
Figure 4-1: Outline Drawing	4-1

## *Black Opal Xtreme Land 15* Ground Mobile Special Flat Panel Display System

### 1 DESCRIPTION

Laserdyne's Black Opal displays have been engineered for a wide range of land-, sea- or air-borne display applications including remote/indirect viewing of video images generated by day, night or thermal cameras.

The Xtreme Land 15 model is a 15" [with XGA (1,024 x 768) resolution] version of the Black Opal display type, specially designed for land vehicle use.

This is a reduced weight/reduced cost model, where some of the stringent measures specific to air and seaborne operations have been relaxed. It retains the advanced video features and generally high level of ruggedisation for which Black Opal displays are renowned.

This model is fitted with a high brightness LED backlight module. LED backlighting improves reliability when compared with standard CCFL (lamp) backlights – not only by substituting solid-state components for fragile lamps, but also by the graceful nature of LED backlight degradation as the unit ages – a missing lamp may make an LCD unreadable, but a few fading LEDs make little difference.

Each Xtreme Land model consists of a LED backlit LCD, a low reflection high clarity window, a microprocessor unit, and power & control electronics. All items are housed within a rugged enclosure containing heating and cooling mechanisms. The LCD is protected by a tough, antireflection-coated window which also provides EMI/EMC shielding. The window is matched to the LCD glass with index-matched materials to minimise internal reflections, eliminating potential internal window fogging and maximising window strength. All models are button operated.

Each model features MultiVision, allowing for multiple analogue and SDI video inputs (for SD, HD and other analogue video formats, and PC RGB inputs), and providing simultaneous display of up to 6 inputs.

Images are displayed on a LED backlit LCD that may be viewed in full direct sunlight down to full darkness and feature backlight settings suitable for low light viewing, for viewing with Night Vision Devices and completely off for black-out conditions.

Black Opal displays have several features designed to increase the effectiveness of surveillance, sighting and security systems, including:

**Image Enhancement:** video inputs are compensated for obscuration (e.g. rain, fog, snow, mist or smoke) within an adjustable central window where contrast and colour are enhanced. For a chosen window size, the enhancement is applied to that portion of the displayed image;

**Digital Zoom:** a fully X & Y interpolated "smart" zoom, not merely pixel multiplying, yields a clear zoomed image without the blocky "pixelated" appearance often seen with digital zooming; and

**Freeze Frame:** freezes the current prime video channel while leaving live any video inset.

**Colourisation:** applies preloaded colour palettes to monochrome imagery.

**Motion ("edge tearing") compensation:** minimises the jagged edges that can occur with motion in video on LCDs.

These displays also provide overlay (chroma keying) capability.

Black Opal display software is easily upgradeable, upgrades can be downloaded in the field via a PC.

## *Black Opal Xtreme Land 15* Ground Mobile Special Flat Panel Display System

### 2 SYSTEM SPECIFICATIONS

Notation - use of brackets in tables: [notes & qualifications] (units) {alternate units}.

#### 2.1 System Performance

PARAMETER		SPECIFICATION
<b>Designation</b>		
<b>Xtreme Land 15</b>		Black Opal ground mobile special – land vehicle dedicated design, 15", high brightness, SXGA resolution
<b>Control</b>		
<b>Control Functions [factory configurable to customer requirements]</b>		On/Off; backlight intensity; menu select; select screen lay-out; select image enhancement feature; digital zoom; freeze frame; night day toggle
<b>Controls</b>		9 tactile LED-backlit (green or red selectable) buttons
<b>Display</b>		
<b>Type</b>		Active Matrix Colour (24-bit colour) LED backlit LCD Module
<b>Display Size (" {cm})</b>	<b>diagonal</b>	15 {38}
	<b>active area</b>	11.97 {30.4} x 8.98 {22.8}
<b>Aspect Ratio [width:height]</b>		4:3
<b>Pixel Number [1 pixel is RGB trio]</b>		1,024 x 768
<b>Colour</b>		16 million [8-bit each colour]
<b>Grey Scale</b>		256 [8-bit]
<b>Backlight Luminance [LED type; approx.; adjustable] (cdm<sup>-2</sup>)<sup>1</sup></b>	<b>minimum</b>	0
	<b>maximum</b>	1,000
<b>Contrast Ratio [limiting; LCD]</b>		700:1
<b>Response Time [typical] (ms)</b>		25 [T <sub>r</sub> = 8; T <sub>f</sub> = 17]
<b>Readability [ambient conditions]</b>		black-out to full direct sunlight [10 <sup>5</sup> lux]
<b>Night Vision Device compatible?</b>		yes [low intensity green; red selectable]
<b>Viewing Angle [full angle] (°)</b>	<b>vertical</b>	±80
	<b>horizontal</b>	±80

<sup>1</sup> 1 cdm<sup>-2</sup> = 1 nit.

# Product Specification



## *Black Opal Xtreme Land 15* Ground Mobile Special Flat Panel Display System

PARAMETER		SPECIFICATION
<b>Inputs</b>		
<b>Physical Connections</b>	<b>Low resolution group</b>	4 simultaneous channels, each channel being either 1 x Y/C or 2 x CVBS
	<b>High Resolution group</b>	1 simultaneous channel, selectable from 6 general purpose analogue inputs. Connections supported are 6 x CVBS, or 3 x Y/C, or 2 x YPrPb, or 2 x RGsB, or 2 x RGBHV.
	<b>SDI group</b>	1 simultaneous channel, selectable from 2 inputs
<b>Signal Formats supported</b>	<b>Low resolution group</b>	Standard definition (SD) only: (PAL/NTSC/SECAM/CCIR-601/RS170; interlaced and non-interlaced)
	<b>High Resolution group</b>	SD using CVBS or Y/C: (PAL/NTSC/SECAM/CCIR-601/RS170; interlaced and non-interlaced) HD using YPrPb or RGB: (720p, 1080i, 1080p); PC RGB input: VESA RGB analogue (UXGA maximum resolution) Other analogue video standards supported on request (i.e. STANAG 3350)
	<b>SDI group</b>	SMPTE 259M, SMPTE 292M (SMPTE 424M optional)
<b>Connection Formats</b>	<b>Low resolution group</b>	CVBS, Y/C. All analogue inputs are 75ohm terminated
	<b>High resolution group</b>	CVBS, Y/C, YPrPb, RGBHV, RGsB. All analogue inputs are 75ohm terminated.
	<b>SDI group</b>	SD-SDI, HD-SDI (3G-SDI optional). BNC, 75 ohm.
<b>Outputs</b>		
<b>Physical Connections</b>	<b>Analogue output group</b>	1 output channel, available from 3 general purpose analogue outputs. Connections supported are SD: (CVBS and Y/C simultaneous) or RGB or YPrPb; or HD: YPrPb or RGB or PC: RGBHV/RGsB [XGA maximum resolution] All analogue outputs are 75ohm
	<b>SDI output group</b>	2 x BNC, 75ohm

# Product Specification



## *Black Opal Xtreme Land 15* Ground Mobile Special Flat Panel Display System

PARAMETER		SPECIFICATION
Signal Formats supported	Analogue output group	SD: PAL/NTSC/SECAM/CCIR-601/RS170 HD: SMPTE 274M 1080p30, 1080i60, 720p60 (maximum resolution) PC: VESA (XGA maximum resolution)
	SDI group	SMPTE 259M, SMPTE 292M (SMPTE 424M optional)
Connection Formats	Analogue output group	CVBS, Y/C, YPrPb, RGBHV, RGsB
	SDI group	Output 1: Re-clocked copy of the selected SDI input channel (same format as the input) Output 2: Configurable to be either (a) any other video input (same format); or (b) A specified format
Functionality	Analogue output group	Configurable to be either (a) pass through any other video input (with a compliant format); or (b) a specified format and image configuration using any of the available inputs (limits apply)
	SDI group	Output 1: Re-clocked copy of the selected SDI input channel (same format as the input) Output 2: Configurable to be either (a) pass through any other video input (with a compliant format); or (b) a specified format and image configuration using any of the available inputs (limits apply)
<b>Safety &amp; Protection</b>		
Cooling		thermal transfer by internal and external convection
Display Window		Antireflection, hard-coated, sealed, EMI/EMC shielded; index-matched to LCD glass
Electrical Protection		conforms to: QSTAG 307; MIL-STD-704E; MIL-STD-1275D; STANAG 3350 (all analogue video inputs) RTCA/DO-160D, Category Z, power input 18 to 30.3Vdc [min. max. & emergency operation, interrupts, abnormal surge (48Vdc for 1s), engine starting undervoltage]; RTCA/DO-160D, Category A, voltage spike [600Vdc for 10µs]

# Product Specification



## *Black Opal Xtreme Land 15* Ground Mobile Special Flat Panel Display System

PARAMETER	SPECIFICATION
Audible Emission [@ ≥ 10m]	nil
<b>Support</b>	
MTBF [@30°C; 100% duty cycle] (hours)	Ground Mobile [wheeled] > 14,700 Airborne Rotary Wing > 6,500
Operational Life (years)	10

### 2.2 Controls

Control Type	Location	Primary Label	Primary Function
Button	left		toggle between active and standby
Button	2 <sup>nd</sup> left		menu
Button	3 <sup>rd</sup> left		show assigned screen lay-outs for selection
Button	4 <sup>th</sup> left		enhance
Button	centre		zoom
Button	4 <sup>th</sup> right		freeze
Button	3 <sup>rd</sup> right		
Button	2 <sup>nd</sup> right		backlight up; scroll/adjust up
Button	right		toggle between Day and Night backlight modes

### 2.3 Communications

PARAMETER	SPECIFICATION
Ports	three Serial ports (maximum)
Data	<b>Format</b> 2 x RS-232, 1 x RS-422 (other configurations available on request – maximum capacity is 2 x RS422 or 4 x RS232)
	<b>Rate (Baud)</b> 115200,n,8,1 standard, others available on request

# Product Specification



## *Black Opal Xtreme Land 15* Ground Mobile Special Flat Panel Display System

### 2.4 Physical Characteristics

PARAMETER		SPECIFICATION	
Mass [approx.] (kg)		< 4.7	
Dimensions (mm)	Width	body	342.1
		overall <sup>2</sup>	366.1
	Height	body	272
		overall <sup>2</sup>	296
	Depth <sup>3</sup>	body	60.4
		overall <sup>2</sup>	75.05
Mounting	Panel Mount	6 x 5.5mm diameter holes in corners, 3 per side	
	Side Mount	2 x M5 tapped holes, 8mm deep, on each side	

### 2.5 Electrical Characteristics

PARAMETER		SPECIFICATION
Supply Voltage (Vdc) [MIL-STD-704C]		18 to 33 [28 nominal]
Current Drain [@ 28Vdc; typical] (A)	heater on	< 5
	heater off	< 1.5

### 2.6 Environmental

PARAMETER		SPECIFICATION	
Temperature (°C) Operate <sup>4</sup> [MIL-STD-810F, Method 501.4; Method 502.4, Survive Procedures I, II]	min. <sup>5</sup>	-40	
	max. <sup>6</sup>	long term	+55
		short term	+71
Thermal Shock [MIL-STD-810F, Method 503.4, Procedure II] (°C in ≤ 1 minute)	min. <sup>5</sup>	-40	
	max. <sup>6</sup>	+71	
Vibration [MIL-STD-810F, Method 514.5, Procedure I, Category 20 ground vehicle wheeled and tracked]		spectra as per figure 514.5C-4; 10Hz to 2kHz; 4 hours per axis	
Shock [MIL-STD-810F, Method 516.5, Procedure I]		40g, 11ms each direction for each axis, half-sine	

<sup>2</sup> Including mounting flange.

<sup>3</sup> Excluding connectors.

<sup>4</sup> When used in accordance with procedures in User's Manual.

<sup>5</sup> Without wind-chill.

<sup>6</sup> Without solar radiation.

# Product Specification



## *Black Opal Xtreme Land 15* Ground Mobile Special Flat Panel Display System

PARAMETER	SPECIFICATION
Sealing [MIL-STD-810F, Method 512.4, Procedure I] <sup>7</sup>	full immersion
Altitude/Low Pressure [transport; MIL-STD-810F, Method 500.4, Procedure I]	15,000 feet
EMI/EMC <sup>7,8</sup>	MIL-STD-461D

### 2.7 Connector/Pin Details

No.	Name	Pin Marking	Purpose	Notes for Harness
<b>J1: Power &amp; Comms Connection:</b> Connector, MilSpec, 38999/24WB35PN, 11-35, Panel, Plug, 'click' screw-on, 13 Way				
J1-1	DC+	1	Power input, +28V nominal	3A maximum current
J1-2	0V	2	Power return	3A maximum current
J1-3	GND1	3	Communication channel 1 GND	Common for TX/RX for comm. channel 1;
J1-4	TX1/TX1-	4	RS232 TX1, or RS422 TX1-	Dual purpose comm. channel 1
J1-5	TX1+	5	RS422 TX1+	Used if RS422 interface is selected for comm. channel 1
J1-6	RX1/RX1-	6	RS232 RX1, or RS422 RX1-	Dual purpose, comm. Channel 1
J1-7	RX1+	7	RS422 RX1+	Used if RS422 interface is selected for comm. Channel 1
J1-8	TX2/TX2-	8	RS232 TX2, or RS422 TX2-	Dual purpose comm. Channel 2
J1-9	RX2/RX2-	9	RS232 RX2, or RS422 RX2-	Dual purpose, comm. Channel 2
J1-10	GND2	10	Communication channel 2 GND	Common for TX/RX for comm. Channel 2;
J1-11	GND3	11	Communication channel 3 GND	Common for TX/RX for comm. Channel 3;

<sup>7</sup> With compliant line connectors attached.

<sup>8</sup> Refer to manufacturer for details.



# Product Specification

## *Black Opal Xtreme Land 15* Ground Mobile Special Flat Panel Display System

No.	Name	Pin Marking	Purpose	Notes for Harness
<b>J1: Power &amp; Comms Connection (cont'd)</b>				
<b>J1-12</b>	TX3/TX2+	12	RS232 TX3, or RS422 TX2+	Dual purpose comm. Channel 2/3. RS422 (on comm. Channel 2) and RS232 (comm. channel 3) are mutually exclusive as they share common pins.
<b>J1-13</b>	RX3/RX2+	13	RS232 RX3, or RX422 RX2+	Dual purpose comm. Channel 2/3. RS422 (on comm. Channel 2) and RS232 (comm. channel 3) are mutually exclusive as they share common pins.
<b>J2: SD Video In/Out Connection:</b> Connector, MilSpec, 38999/24WC35SN, 13-35, Panel, Socket, 'click' screw-on, 22 Way				
<b>J2-1</b>	Y1/CVBS1	1	Video channel 1 luma/composite signal	75 ohm terminated
<b>J2-2</b>	C1/CVBS5	2	Video channel 1 chroma signal/second composite signal for channel 1	75 ohm terminated
<b>J2-3</b>	Y2/CVBS2	3	Video channel 2 luma/composite signal	75 ohm terminated
<b>J2-4</b>	C2/CVBS6	4	Video channel 2 chroma signal/second composite signal for channel 2	75 ohm terminated
<b>J2-5</b>	Y3/CVBS3	5	Video channel 3 luma/composite signal	75 ohm terminated
<b>J2-6</b>	C3/CVBS7	6	Video channel 3 chroma signal/second composite signal for channel 3	75 ohm terminated
<b>J2-7</b>	Y4/CVBS4	7	Video channel 4 luma/composite signal	75 ohm terminated
<b>J2-8</b>	C4/CVBS8	8	Video channel 4 chroma signal/second composite signal for channel 4	75 ohm terminated
<b>J2-9</b>	Out1	9	CVBS output (SD), or Y/G output (HD/PC)	Video output, 75 ohm impedance.
<b>J2-10</b>	GND_Out1	10	Video output 1 GND	Return for Out1
<b>J2-11</b>	Out2	11	Luma output (S-VIDEO), or Pb/B output (HD/PC)	Video output, 75 ohm impedance.

# Product Specification



## *Black Opal Xtreme Land 15* Ground Mobile Special Flat Panel Display System

No.	Name	Pin Marking	Purpose	Notes for Harness
<b>J2: SD Video In/Out Connection (cont'd)</b>				
<b>J2-12</b>	GND_Out2	12	Video output 2 GND	Return for Out2
<b>J2-13</b>	Out3	13	Chroma output (S-Video), or Pr/R output (HD/PC)	Video output, 75 ohm impedance.
<b>J2-14</b>	GND_Out3	14	Video output 3 GND	Return for Out3
<b>J2-15</b>	GND1	15	Video channel 1 GND	Common for Y1 and C1
<b>J2-16</b>	GND2	16	Video channel 2 GND	Common for Y2 and C2
<b>J2-17</b>	GND3	17	Video channel 3 GND	Common for Y3 and C3
<b>J2-18</b>	GND4	18	Video channel 4 GND	Common for Y4 and C4
<b>J2-19</b>	HS_Out	19	Horizontal sync output	Synchronisation signal if sync-on-green or sync-on-Y is not used.
<b>J2-20</b>	VS_Out	20	Vertical sync output	Synchronisation signal if sync-on-green or sync-on-Y is not used.
<b>J2-21</b>	Sync_GND	21	HS,VS Ground	Common for HS and VS signals
<b>J2-22</b>	Dimming	22	Analog Input, used to externally control the backlight (if enabled)	0 to 32V range, maximum detected input is 60V.
<b>J3: HD Video Connection:</b> Connector, MilSpec, 38999/24WC35PN, 13-35, Panel, Plug, 'click' screw-on, 22 Way				
<b>J3-1</b>	GREENA1	1	Analog video input: GreenA1 / YA1 / YA1/ CVBSA1 input	75 ohm terminated. Use as Green for PC input (with pins 3 and 5). Also can be used as Y for component (with pins 3 and 5 for Pr, Pb), Y for s-video (with pin 7 for chroma), or as a CVBS input
<b>J3-2</b>	GREENA1_GND	2	GND return for pin 1	
<b>J3-3</b>	BLUEA1	3	Analog video input: BlueA1 / PbA1 / YA2/ CVBSA2 input	75 ohm terminated. Use as Blue for PC input (with pins 1 and 5). Also can be used as Pb for component (with pins 1 and 5 for Y, Pr), Y for s-video (with pin 9 for chroma), or as a CVBS input
<b>J3-4</b>	BLUEA1_GND	4	GND return for pin 3	



Copyright. All Rights Reserved. Laserdyne Pty Ltd

# Product Specification



## *Black Opal Xtreme Land 15* Ground Mobile Special Flat Panel Display System

No.	Name	Pin Marking	Purpose	Notes for Harness
<b>J3: HD Video Connection (cont'd)</b>				
<b>J3-5</b>	REDA1	5	Analog video input: RedA1 / PrA1 / YA3/ CVBSA3 input	75 ohm terminated. Use as Red for PC input (with pins 1 and 3). Also can be used as Pr for component (with pins 1 and 3 for Y, Pb), Y for s-video (with pin 11 for chroma), or as a CVBS input
<b>J3-6</b>	REDA1_GND	6	GND return for pin 5	
<b>J3-7</b>	REDA2	7	Analog video input: RedA2 / PrA2 / CA1/ CVBSA4 input	75 ohm terminated. Use as Pr for HD input (with pins 9 and 11). Also can be used as Red (with pins 9 and 11), C for s-video (with pin 1 for luma), or as a CVBS input
<b>J3-8</b>	REDA2_GND	8	GND return for pin 7	
<b>J3-9</b>	BLUEA2	9	Analog video input: BlueA2 / PrA2 / CA2/ CVBSA5 input	75 ohm terminated. Use as Pb for HD input (with pins 7 and 11). Also can be used as Blue (with pins 7 and 11), C for s-video (with pin 3 for luma), or as a CVBS input
<b>J3-10</b>	BLUEA2_GND	10	GND return for pin 9	
<b>J3-11</b>	GREENA2	11	Analog video input: GreenA2 / YA2/ CA3/ CVBSA6 input	75 ohm terminated. Use as Y for HD input (with pins 7 and 9). Also can be used as Green (with pins 7 and 9), C for s-video (with pin 5 for luma), or as a CVBS input
<b>J3-12</b>	GREENA2_GND	12	GND return for pin 11	
<b>J3-13</b>	DDC_SCL	13	DDC channel clock (RGB1)	Optional
<b>J3-14</b>	DDC_SDA	14	DDC channel data (RGB1)	Optional
<b>J3-15</b>	HSA1	15	Horizontal Sync, for RGB A1	TTL level
<b>J3-16</b>	VSA1	16	Vertical Sync, for RGB A1	TTL level
<b>J3-17</b>	GND A1	17	GND for HSA1, VSA1	
<b>J3-18</b>	HSA2	18	Horizontal Sync, for RGB A2	TTL level
<b>J3-19</b>	VSA2	19	Vertical Sync, for RGB A2	TTL level

# Product Specification



## *Black Opal Xtreme Land 15* Ground Mobile Special Flat Panel Display System


No.	Name	Pin Marking	Purpose	Notes for Harness
<b>J3: HD Video Connection (cont'd)</b>				
<b>J3-20</b>	GND A2	20	GND for HSA2, VSA2	
<b>J3-21</b>	DDC_+5V	21	DDC channel +5V	Optional
<b>J3-22</b>	DDC_GND	22	DDC channel GND	Optional
<b>J4: Earth Point Connection: M5 threaded stud</b>				
<b>J5: Misc. Connection (optional):</b> Connector, MilSpec, 38999/24WC35PA, 13-35, Panel, Plug, 'click' screw-on, 22 Way				
<b>J5-1</b>	TX+	1	Ethernet TX+ pin 1	Fully protected against transients.
<b>J5-2</b>	TX-	2	Ethernet TX- pin 2	Fully protected against transients.
<b>J5-3</b>	RX+	3	Ethernet RX+ pin 3	Fully protected against transients.
<b>J5-4</b>	RX-	4	Ethernet RX- pin 6	Fully protected against transients.
<b>J5-5</b>	SHIELD	5	Shield for Ethernet (chassis)	tied to chassis
<b>J5-6</b>	USB_+5V	6	USB Pin 1	factory configured, ESD protection only
<b>J5-7</b>	USB_-DATA	7	USB Pin 2	factory configured, ESD protection only
<b>J5-8</b>	USB_+DATA	8	USB Pin 3	factory configured, ESD protection only
<b>J5-9</b>	USB_GND	9	USB Pin 4	factory configured, ESD protection only
<b>J5-10</b>	Audio_L_in	10	Audio input, Left	Fully protected against transients.
<b>J5-11</b>	Audio_R_in	11	Audio input, Right	Fully protected against transients.
<b>J5-12</b>	Audio_L_out	12	Audio output, Left	Fully protected against transients.
<b>J5-13</b>	Audio_R_out	13	Audio output, Right	Fully protected against transients.
<b>J5-14</b>	Audio_GND.	14	Common for audio	tied to chassis
<b>J5-15</b>	PS2_DATA	15	PS2 pin 1, or USBOTG D+	factory configured, ESD protection only
<b>J5-16</b>	PS2_GND	16	PS2 pin 3, or USBOTG GND	factory configured, ESD protection only
<b>J5-17</b>	PS2_VCC	17	PS2 pin 4, or USBOTG VBUS	factory configured, ESD protection only
<b>J5-18</b>	PS2_CLK	18	PS2 pin 5, or USBOTG D-	factory configured, ESD protection only
<b>J5-19</b>	Audio_GND_IN	19		tied to chassis
<b>J5-20</b>	Audio_GND_OUT	20		tied to chassis

# Product Specification



## *Black Opal Xtreme Land 15* Ground Mobile Special Flat Panel Display System

No.	Name	Pin Marking	Purpose	Notes for Harness
<b>J5: Misc. Connection (cont'd)</b>				
<b>J5-21</b>	spare1	21	unused, or Ethernet LED+ for SPD LED, or USBOTG ID	factory configured, ESD protection only
<b>J5-22</b>	spare2	22	unused, or Ethernet LED+ for LINK LED.	factory configured, ESD protection only
<b>J6: SDI Input #1 Connection: Connector, BNC</b>				
	SDI In1		SDI input #1 for SD-SDI, HD-SDI (3G-SDI optional)	75 ohm BNC. Cable must comply with loss requirements of SMPTE 292M.
<b>J7: SDI Input #2 Connection: Connector, BNC</b>				
	SDI In2		SDI input #2 for SD-SDI, HD-SDI (3G-SDI optional)	75 ohm BNC. Cable must comply with loss requirements of SMPTE 292M.
<b>J8: SDI Output #1 Connection: Connector, BNC</b>				
	SDI Out1		Selected SDI input e-clocked Output	75 ohm BNC. Cable must comply with loss requirements of SMPTE 292M.
<b>J9: SDI Output #2 Connection: Connector, BNC</b>				
	SDI Out2		Generated SDI output (SD-SDI, HD-SDI (3G-SDI optional)	75 ohm BNC. Cable must comply with loss requirements of SMPTE 292M.
<b>J10: Heater Power Connection: Connector, MilSpec, 38999/24WA35PN, 13-35, Panel, Plug, 'click' screw-on, 6 Way</b>				
<b>J10-1</b>	Heater Power1 +	1	Power input, +28V nominal	5A maximum current
<b>J10-2</b>	Heater Power1 -	2	Power return	5A maximum current
<b>J10-3</b>	Heater Power2 +	3	Power input, +28V nominal	5A maximum current
<b>J10-4</b>	Heater Power2 -	4	Power return	5A maximum current
<b>J10-5</b>	Display Power +	5	Power input, +28V nominal	5A maximum current
<b>J10-6</b>	Display Power -	6	Power return	5A maximum current

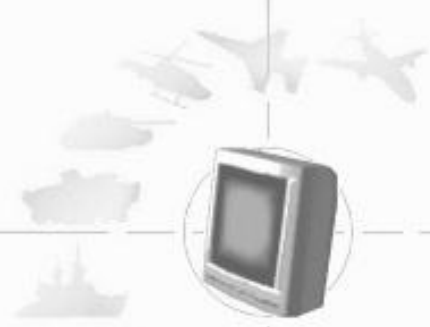

Copyright. All Rights Reserved. Laserdyne Pty Ltd

## *Black Opal Xtreme Land 15* Ground Mobile Special Flat Panel Display System

### 3 SET-UP

#### 3.1 Mounts

The unit has two mounting methods:

1. Panel Mount: six 5.5 diameter holes, 3 per side.
2. Side Mount: two M4 tapped holes, 8mm deep, on each side of the rear section.

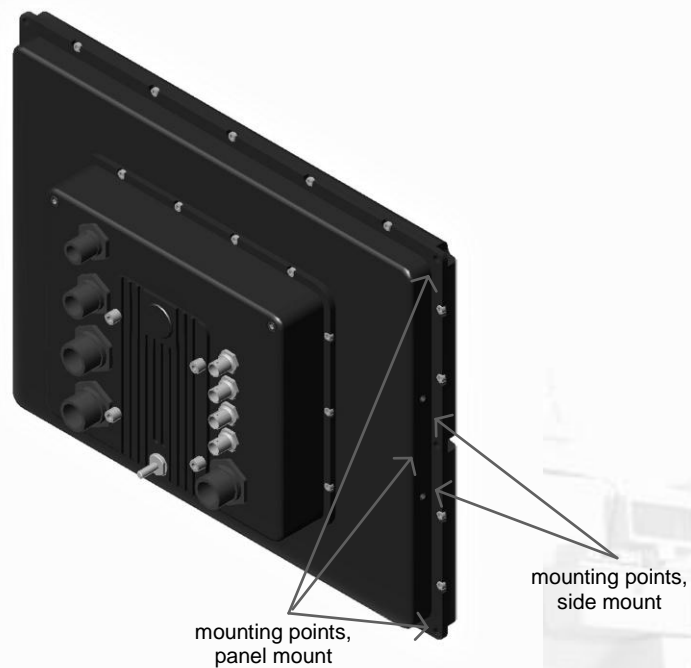


Figure 3-1: Mounts

#### 3.2 Connections

The unit has ten connection points located on the rear:

- Connector J1, the Power & Comms connection;
- Connector J2, the SD Video In/Out connection;
- Connector J3, the HD Video connection;
- Connector J4, the Earth Point connection;

## *Black Opal Xtreme Land 15* Ground Mobile Special Flat Panel Display System

Connector J5, the Miscellaneous connection (optional);


Connector J6, the SDI Input #1 connection;

Connector J7, the SDI Input #2 connection;

Connector J8, the SDI Output #1 connection;

Connector J9, the SDI Output #2 connection; and

Connector J10, the Heater Power connection.

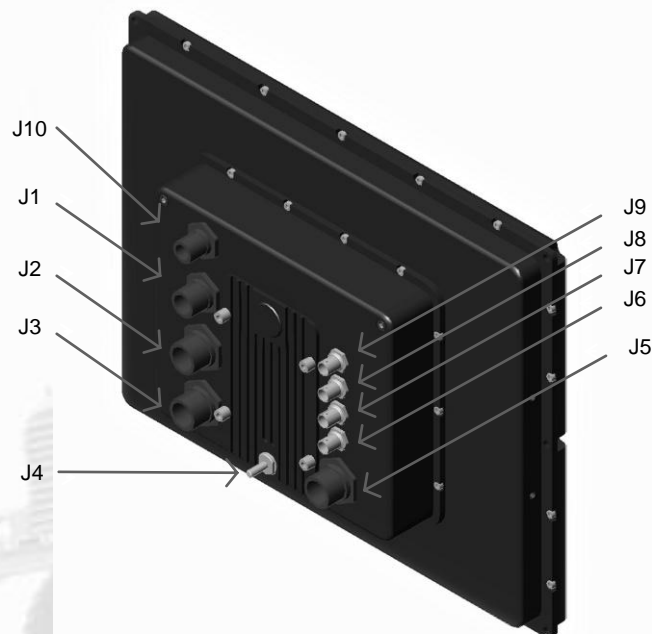

### 3.3 Set-up Procedure

**CAUTION:** User-supplied cables must be correctly wired (see list of Connector/Pin Details).

Ensure that external power is within the range specified herein.

Ensure that external power is OFF before proceeding with set-up.

## *Black Opal Xtreme Land 15* Ground Mobile Special Flat Panel Display System

- Mount the unit to the vehicle or platform, using one of the mounting methods provided.
- Connect the earth point on the unit to an appropriate point on the vehicle.
- Connect the required cables for video in/out to the unit and to the external imaging system(s).
- Connect the required power/data cable to the unit and to the external power source, and to the communication data source.
- Connect the required cable for heater power to the unit and to the external power source.

### 3.4 Heating and Cooling

The unit contains internal heating and cooling mechanisms that are triggered at certain internal temperatures.

The approximate warm-up rate is 17s/°C (e.g. with starting internal temperature of -40°C, unit will power up in about 11 minutes; with starting internal temperature of -25°C, unit will power up in about 7 minutes).

Once the unit has warmed it will operate normally provided that the ambient temperature stays within the specified operating temperature range.

The operating procedures, internal temperatures and resulting operating conditions are shown in the following table.

Ambient Temp. (°C)	Procedure	Internal Temp. (°C)	Operating Condition
< -40	do not attempt to operate unit		
-40 to 0	de-ice unit prior to start-up	≤ 0	unit will not power up; heater on
		> 0	unit will power up; internal convection on
0 to +55	none	≥ 10	heater off
		≥ 55	backlight reduces
+55 to +70	provide forced air cooling (e.g. fan)		
> +70	do not attempt to operate unit	≥ 75	unit will not power up



# Product Specification



## Black Opal Xtreme Land 15 Ground Mobile Special Flat Panel Display System

### 4 OUTLINE DRAWING

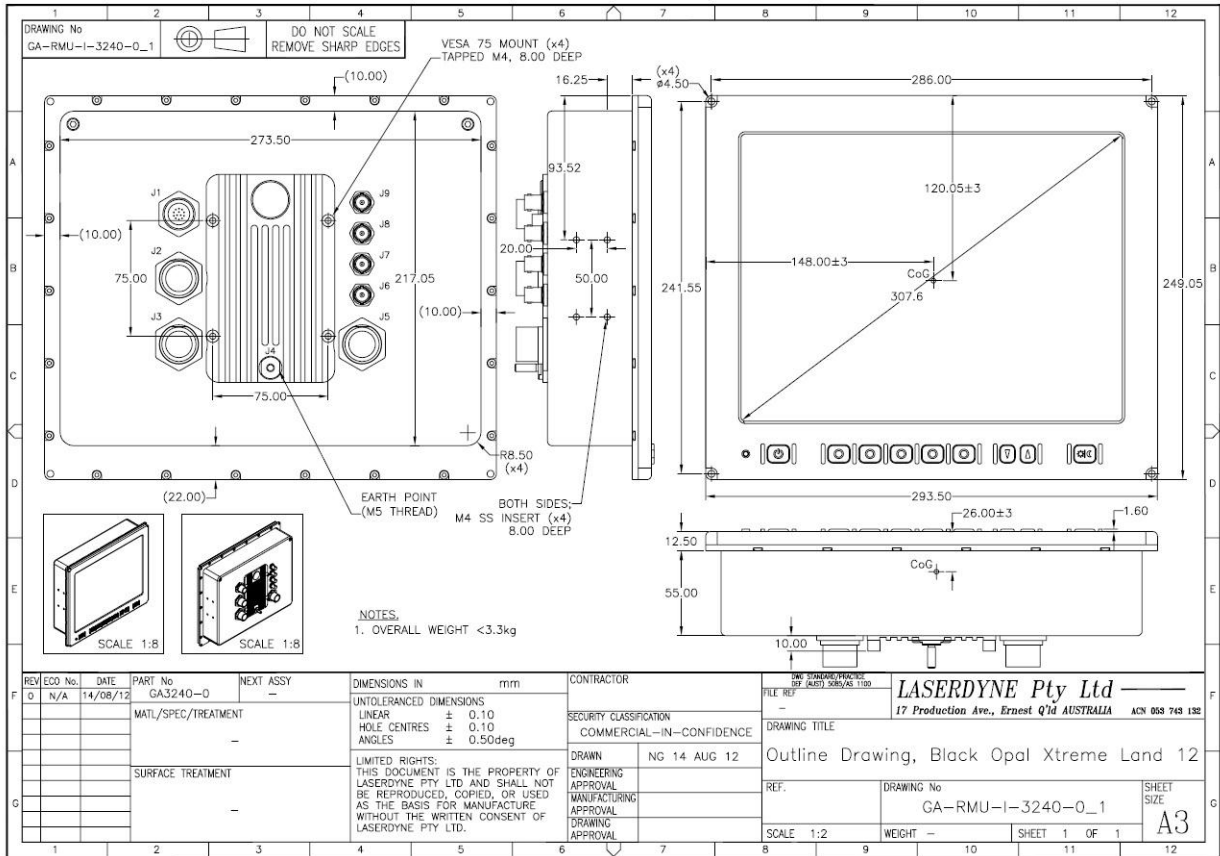


Figure 4-1: Outline Drawing



A Division of Laserdyne Pty Ltd  
A.C.N. 053 743 132

P.O. Box 6541 17 Production Ave  
GCMC Bundall Molendinar  
Queensland 9726 Queensland 4214  
Australia Australia

Tel: (07) 5594 9772 Int'l Tel: 61 7 5594 9772  
Fax: (07) 5594 9981 Int'l Fax: 61 7 5594 9981

email: laserdyne@laserdyne.com.au  
website: www.laserdyne.com.au

The information contained herein is proprietary to Laserdyne Pty Ltd. No part of this work may be reproduced or copied in any way without prior written permission of Laserdyne Pty Ltd.  
Note: specifications herein are subject to change without notice.

Copyright. All Rights Reserved. Laserdyne Pty Ltd

File: PS-RMU-S-2120-A_1	Author(s): TW	Authorised: TW	Rev. Date: 14.8.12	Page 4-1
-------------------------	---------------	----------------	--------------------	----------